

# OCXO 36 x 27 mm Dip Type OC Series



## Features

- For base station and wireless communication application.

## Electrical Specifications

Item / Type	OC
Dimension	36x27 mm Typ.
Nominal Frequency [#1]	10, 16.384MHz
Output Type [#2]	CMOS, Sinewave
Output Load	15pF, 50ohm Typ. [#3]
Supply Voltage (Vcc)	5V, 12V
Power Consumption	3.0 W Max. While Warm-Up 1.25 W Max. at Steady State
Warm-up Time	5 Minutes Typ.
Initial Tolerance	± 0.2 ppm Max.
Operating Temperature Range [#4]	- 10 to + 70 °C
Frequency Stability vs. Operating Temperature Range	± 3 to ± 10 ppb Max.
Frequency Stability vs. Load Variation	± 5 ppb Max. for ± 5 % Variation
Frequency Stability vs. Supply Voltage Variation	± 5 ppb Max. for ± 5 % Variation
Aging	<± 80 ppb / year
Control Voltage Range (Vc) [#5]	0 to 4 V
Frequency Pulling Range	± 1.0 ppm Typ.
Linearity	10% Max.
Voltage Reference	Option : 4V Typ. [#6]
Phase Noise	1 Hz: < -80 dBc/Hz 100 Hz: < -140 dBc/Hz 10 kHz: < -150 dBc/Hz -165 dBc/Hz low floor option

[#1] Contact sales agent for other frequency requirement

[#2] Available output type: CMOS for all series, Sinewave for OB & OC series


[#3] Available load: 15pF Typ. for CMOS and 50ohm Typ. for Sinewave output

[#4] Contact sales agent for other temperature range and stability requirement

[#5] Contact sales agent for other Vc range requirement

[#6] Contact sales agent for available option

## Dimensions

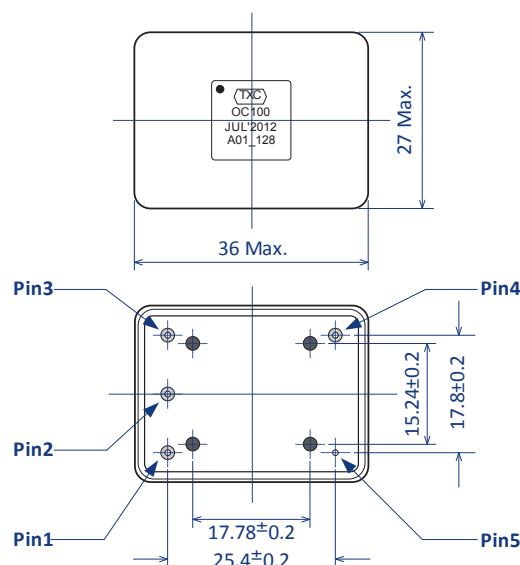

Pin function:

Pin 1: Vc

Pin 2: N.C./Vref (Option)

Pin 3: Vcc

Pin 4: Output

Pin 5: Ground

Units: mm

Remark : Specification subject to change without prior notice. Please confirm with our sales. <http://www.txcorp.com>