


## NX5032SD

For Automotive

### ■ Features

A small surface-mount type crystal unit, ideal for the special requirements of automotive, such as TPMS (Tire Pressure Monitoring System). The crystal unit is ideally suited for the clock signal generating source of the transmission unit in a tire wheel that is subject to strong centrifugal force.

- Stable frequency characteristics even with a powerful centrifugal force of 2,000 G, as found in the transmission side of TPMS applications.
- Excellent environmental performance including heat, vibration, shock and heat cycle resistance.
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- Conforms to AEC-Q200.

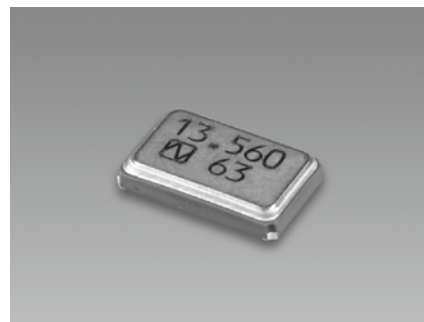


Pb  
Free

RoHS Compliant  
Directive 2011/65/EU

### ■ Specifications

Item	Model	NX5032SD
Nominal Frequency		9.75 to 40 MHz
Overtone Order		Fundamental
Frequency Tolerance (25 ±3 °C)		±15 × 10 <sup>-6</sup>
Frequency versus Temperature Characteristics (with reference to +25 °C)		±50 × 10 <sup>-6</sup>
Operating Temperature Range		-40 to +125 °C
Storage Temperature Range		-40 to +125 °C
Equivalent Series Resistance		Refer to *1
Level of Drive		10 μW (Max. 100 μW)
Load Capacitance		12 pF
Specifications Number		STD-CSY-1

### ■ Dimensions

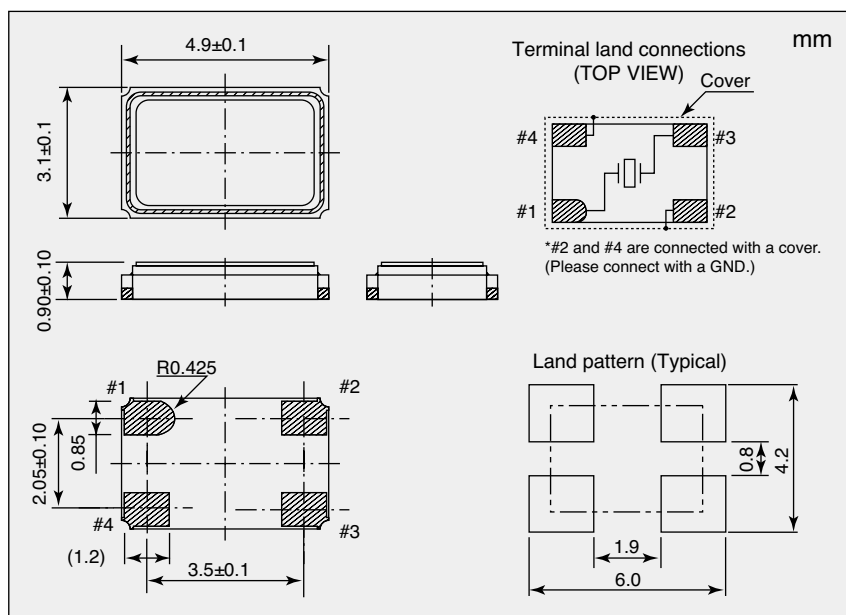

#### \*1 Equivalent Series Resistance

Nominal frequency (MHz)	Equivalent Series Resistance max. [Ω]
9.75 to 10	150
10 to 15	120
15 to 20	100
20 to 40	80

Please specify the model name, frequency, and specification number when you order products.  
For further questions regarding specifications, please feel free to contact us.