

# VFXO301

## XO Low Jitter 2.5V, 3.3V

### 5x7mm SMD, LVPECL / LVDS

#### Features

- 38MHz to 800 MHz frequency range
- Ultra low phase noise
- <0.5 ps RMS jitter over 12kHz - 20MHz



#### RoHS Status



#### Applications

- Optical Networking, SONET / SDH
- 10 Gigabit Ethernet
- Broadband Access

#### Electrical Specifications

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Frequency Range	F		38		800	MHz	3..3V 2.5V
Frequency Stability	$\Delta F/F$	Vs. Operating Temperature			$\pm 50$ $\pm 25$ $\pm 20$	ppm	Order Code B Order Code C Order Code D
		Vs. Supply Voltage			$\pm 3$	ppm/V	
		Vs. Aging / Year		$\pm 3$ $\pm 1$		ppm ppm/y	First Year After first year
Operating Temperature	T		0° -40°		+70° +85°	°C	Order Code B Order Code G
Output		LVPECL LVDS			Available up to 800MHz Available up to 640MHz		Order Code L Order Code D
Supply Voltage	$V_{CC}$		3.15 2.375	3.3 2.5	3.45 2.625	V	Order Code E Order Code G
Period RMS Jitter		77.76MHz 155.52MHz 311.08MHz 622.08MHz		2.5 3 3 6	4 4 5 8	ps	
Integrated RMS Jitter 12kHz to 20MHz		155.52MHz 311.04MHz 622.08MHz		0.4 0.4 0.4	0.5 0.5 0.5	ps	
Period Jitter Peak-to-Peak		77.76MHz 155.52MHz 311.08MHz 622.08MHz		18 20 25 42	30 30 30 55	ps	
Symmetry		$(V_{DD}-1.3) V_{DC}$ $1.25V_{DC}$	45 45		55 55	%	PECL LVDS

**VFXO301**  
**XO Low Jitter 2.5V, 3.3V**  
**5x7mm SMD, LVPECL / LVDS**



Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Phase Noise		10Hz		-66		dBc/Hz	@77.76MHz
		100Hz		-96			
		1kHz		-124			
		10kHz		-136			
		100kHz		-132			
		1MHz		-145			
		10Hz		-62		dBc/Hz	@155.52MHz
		100Hz		-92			
		1kHz		-120			
		10kHz		-132			
		100kHz		-128			
		1MHz		-144			
		10Hz		-59		dBc/Hz	@311.04MHz
		100Hz		-86			
		1kHz		-116			
		10kHz		-129			
		100kHz		-124			
		1MHz		-138			
		10Hz		-48		dBc/Hz	@622.08MHz
		100Hz		-80			
		1kHz		-108			
		10kHz		-118			
		100kHz		-114			
		1MHz		-130			
Supply Current	I <sub>CC</sub>	38 – 100MHz			65	mA	PECL
		100 – 300MHz			80		
		300 – 800MHz			95		
		38 – 100MHz			45	mA	LVDS
		100 – 320MHz			60		
		320 – 640MHz			75		
Load	50 Ohms to V <sub>DD</sub> -2V (PECL) 100 Ohms (LVDS)						
Output High Voltage	V <sub>OH</sub>		V <sub>DD</sub> -1.025 1.4		1.6	V	PECL LVDS
Output Low Voltage	V <sub>OL</sub>		0.9	1.1	V <sub>DD</sub> -1.620	V	PECL LVDS
Output Differential Voltage	V <sub>OD</sub>		247	355	454	mV	LVDS
Offset Voltage	V <sub>OS</sub>		1.125	1.2	1.375	V	LVDS
Rise / Fall Time	T <sub>R</sub> /T <sub>F</sub>	20% to 80%		0.6 0.7	1.5 1.0	ns	PECL LVDS
Tristate	"1": Output Enable – Pin 1 may float or 2.8V min (3.3V V <sub>DD</sub> ) or 2.25V min (2.5V V <sub>DD</sub> ) "0": Tristate – Pin 1 requires 0.4V max (3.3V or 2.5V V <sub>DD</sub> )						

**VFXO301**  
**XO Low Jitter 2.5V, 3.3V**  
**5x7mm SMD, LVPECL / LVDS**



**Absolute Maximum Ratings**

Parameter	Symbol	Condition	Min	Typ	Max	Unit	Note
Lead Temperature		Soldering, 10s max			260	°C	
Storage Temperature	T <sub>s</sub>		-55		+125°	°C	
Junction Temperature	T <sub>J</sub>				+125°	°C	
ESD Protection		Human Body Model			2	kV	

**Environmental and Mechanical Conditions**

Parameter	Conditions
Shock	1000 Gs, 0.35ms, ½ sine wave, 3 shocks in each plane
Humidity	Resistant to 85 °R.H. at 85 °C
Vibration	10-2000 Hz of 0.06" d.a. or 20 Gs, whichever is less
Leak	Leak rate less than 5x10 <sup>-8</sup> atm.cc/s of helium (crystal only)
Case	Ceramic with hermetic resistance-welded metal lid
Pads	Solderable gold over nickel
Marking	Epoxy ink or laser engraved
Resistance to Solvents	MIL STD 202, Method 215


# VFXO301

## XO Low Jitter 2.5V, 3.3V


### 5x7mm SMD, LVPECL / LVDS

### Pin Assignments


Pin #	Connection
1	Tristate
2	N/C
3	Case, GND
4	Output
5	Output
6	Supply Voltage

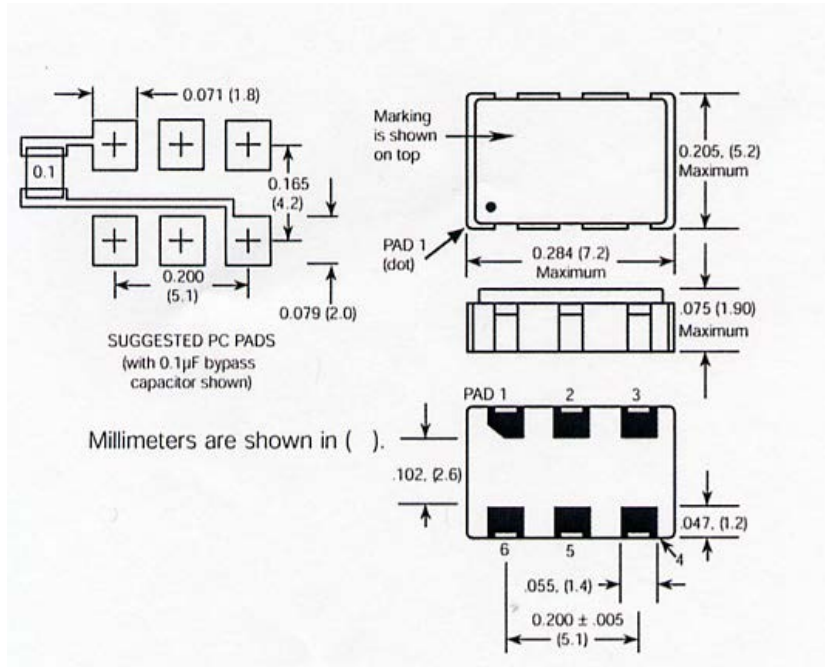

### Marking Specification

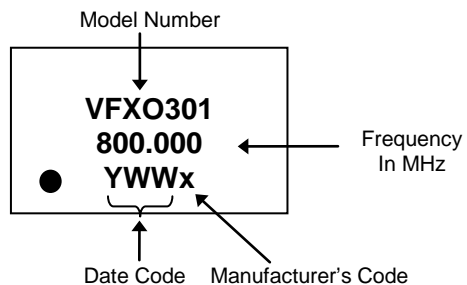

### How to Order

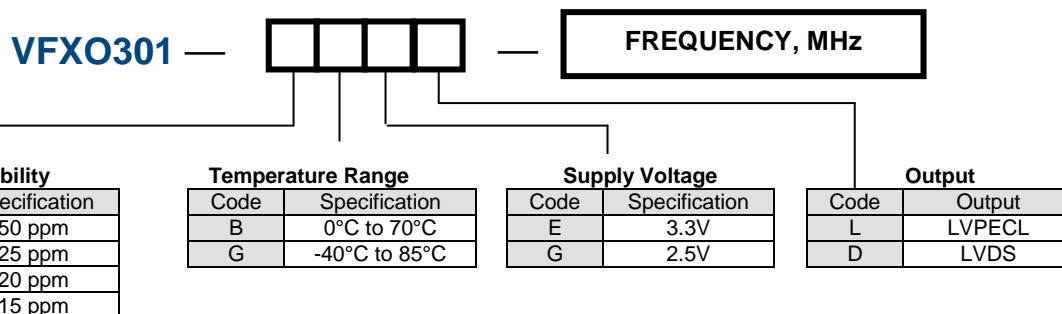

\*\*not available for all frequencies.  
Please consult the factory