

# Crystal Oscillator

## NT1612AA


Temperature Compensated Crystal Oscillator(TCXO)  
for high-precision GPS

### ■ Main Application

Smartphone / Mobile phone, Wireless module, and GPS / GNSS module, etc.

### ■ Features

- A crystal oscillator with highly stable frequency / temperature characteristics best suited for GPS.
- Supports low power supply voltage. (Supports DC +1.68 V to +3.63 V.)
- Ultra-compact and light with a height, cubic volume, and weight of Max. 0.55 mm, 0.0011 cm<sup>3</sup>, and 0.004 g, respectively.
- A surface-mount crystal oscillator. (Reflow soldering is possible.)
- Lead-free. Meets the requirements for re-flow profiling using lead-free solder.
- With an AFC (Automatic Frequency Control) function. (Option)

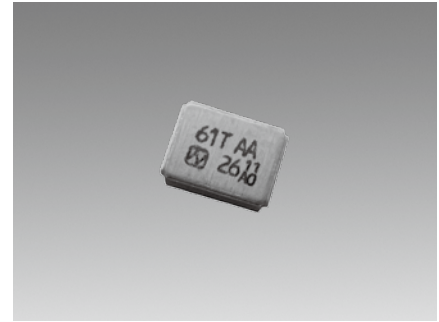

Pb  
Free

RoHS Compliant  
Directive 2011/65/EU


### ■ Specifications

Item	Model	NT1612AA	
Nominal Frequency Range (MHz)		26 to 52	
Standard Frequency (MHz)	26		52
Supply Voltage [V <sub>CC</sub> ] (V)		+1.8	
Load Impedance		10 kΩ//10 pF	
Current Consumption (mA)	Max. 1.5		Max. 2.0
Output Voltage		Min. 0.8 V(p-p) (DC Coupling *1)	
Frequency/Temperature Characteristics		Max. $\pm 0.5 \times 10^{-6}$	
Operating Temperature Range (°C)		-30 to +85	
Storage Temperature Range (°C)		-40 to +85	
Frequency/Voltage Coefficient		Max. $\pm 0.1 \times 10^{-6} / +1.8 \text{ V} \pm 5 \%$	
Frequency/Load Coefficient		Max. $\pm 0.1 \times 10^{-6} / (10 \text{ k}\Omega // 10 \text{ pF}) \pm 10 \%$	
Long-term Frequency Stability		Max. $\pm 1.0 \times 10^{-6} / \text{year}$	
Specification Number		NSC5075A	NSC5075B

• Frequency setting conditions : Frequencies are set at normal temperatures (+25±2 °C).

\*1. A DC-cut capacitor is not embedded in this crystal oscillator. Connect a DC-cut capacitor (1,000 pF) to the line-out terminal of the oscillator.

### ■ Dimensions

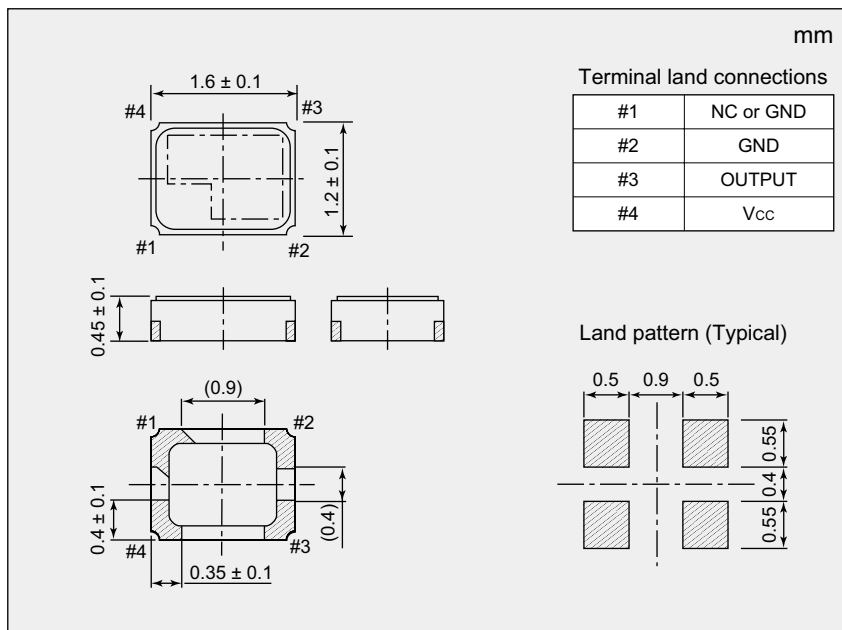

Please specify the model name, frequency, and specification number when you order products.  
For further questions regarding specifications, please feel free to contact us.