


# COMMUNICATION CRYSTALS

## ULTRA MINIATURE • UM-1 • UM-4 • UM-5

ABU, ABU4, ABU5



### FEATURES:

- Compact size.
- High precision crystal.
- Hermetically sealed.
- Excellent frequency temperature characteristics across a wide temperature range.


### APPLICATIONS:

- Pagers
- Hand-held phones
- Cordless phones
- Communication equipment

### STANDARD SPECIFICATIONS:

PARAMETERS	ABU (UM-1)	ABU4 (UM-4) & ABU5 (UM-5)
Frequency Range	6MHz - 200MHz	10MHz - 200MHz
Operation Mode	6.00MHz ≤ F ≤ 25.00MHz (Fundamental) 25.0MHz < F < 72.0MHz (3rd overtone) 72.00MHz < F < 160.0MHz (5th overtone) 160.0MHz ≤ F ≤ 200.00MHz (7th overtone)	
Operating Temperature	0°C to +70°C (See Options)	
Storage Temperature	-40°C to +125°C	
Frequency Tolerance @ 25°C	±50ppm max. (See Options)	
Frequency Stability over Temp.	±50ppm max. (See Options)	
Equivalent Series Resistance (ESR)	120 Ω max. for 6.0MHz < F < 7.0MHz	
	100 Ω max. for 7.0MHz ≤ F < 8.0MHz	
	80 Ω max. for 8.0MHz ≤ F < 10.0MHz	
	60 Ω max. for 10.0MHz ≤ F < 11.0MHz	
	50 Ω max. for 11.0MHz ≤ F < 12.0MHz	
	40 Ω max. for 12.0MHz ≤ F < 14.0MHz	
	30 Ω max. for 14.0MHz ≤ F ≤ 25.0MHz	
Fundamental	70 Ω max. for 25.0MHz ≤ F < 72.0MHz	
3rd Overtone	100 Ω max. for 72.0MHz ≤ F < 160.0MHz	
5th Overtone	140 Ω max. for 160.0MHz ≤ F ≤ 200.0MHz	
7th Overtone		
Shunt Capacitance C <sub>0</sub>	7pF max.	
Load Capacitance C <sub>L</sub>	18pF (See Options)	
Drive Level	1mW max., 100μW correlation	
Aging @ 25°C First Year	±3ppm max. (tighter aging available)	
Insulation Resistance	500M Ω min. at 100Vdc ±15V	

### OUTLINE DIMENSIONS

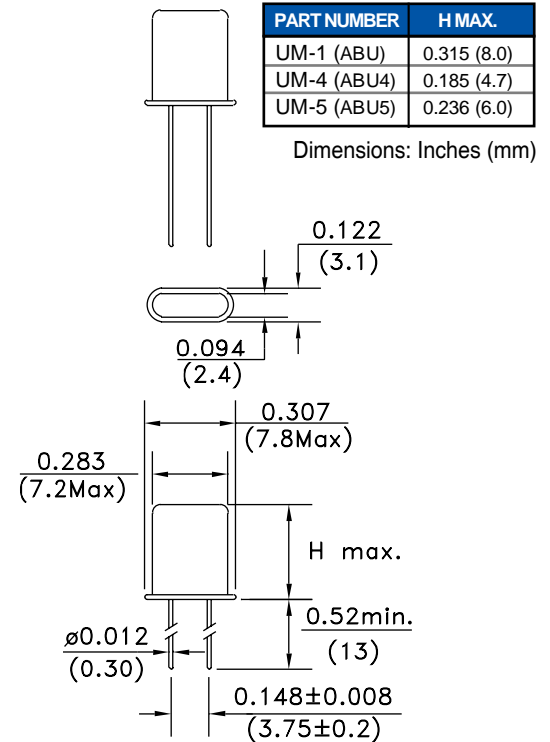

### OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

