

TTL OUTPUT HALF SIZE DIP CRYSTAL CLOCK OSCILLATOR

AHT Series



RoHS
Compliant



13.2 x 13.2 x 5.5mm

FEATURES:

- Hermetically sealed metal package
- TTL output
- Case ground for EMI protection
- Tri-state Enable/Disable options

APPLICATIONS:

- Provide clock signals for microprocessors and digital circuits
- TTL output for low EMI applications

STANDARD SPECIFICATIONS:

PARAMETERS	
ABRACON P/N	AHT Series
Frequency:	400kHz to 160MHz
Operating temperature:	0°C to +70°C (see options)
Storage temperature:	- 55°C to + 125°C
Overall frequency stability*:	± 100ppm max. (see options)
Supply voltage (Vdd):	5.0Vdc ± 10%
Input current:	See Table 1
Symmetry:	40/60% max. (see option)
Rise and Fall Times (Tr/Tf):	See Table 1
Output load:	10 TTL max.
Output Voltage:	VOH = 0.9 * Vdd min. VOL = 0.1* Vdd max.
Tri State Function:	"1" (VIH >= 2.4 Vdc) or open: Oscillation "0" (VIL < 0.4V): Hi Z
Output Disable/ Enable time:	100 ns max. (for Option "-A" ONLY)
Start-up-time:	10 to 35 ms max

Table 1

Frequency MHz	Input current mA	Rise/Fall time ns
400.000kHz ≤ F < 24.999MHz	20	10
25.000Hz ≤ F < 100.000MHz	40	5
100.000kHz ≤ F < 160.000MHz	80	4

* Overall frequency stability includes initial tolerance, temperature stability, and aging.

OPTIONS & PART IDENTIFICATION:

(Left blank if standard)

AHT - Frequency - □ - □ - □ - □ - □

Temperature Options	
I	0°C to +50°C
D	-10°C to +60°C
E	-20°C to +70°C
F	-30°C to +70°C
N	-30°C to +85°C
L	-40°C to +85°C

Freq. Stability	
J*	±20 ppm max.
R	±25 ppm max.
K	±30 ppm max.
H	±35 ppm max.
C	±50 ppm max.

*Temp option I, D, and E only

Symmetry Options	
S	45/55% @ 1/2 Vdd

Tristate Enable Funct	
A	Tristate Function

Value Added Option	
G	Gull Wing
G2	Gull Wing
GHT	Gull Wing Reflow
Q45	0.45(11.43)
Q40	0.40(10.16)
Q35	0.25(8.89)
Q30	0.30(7.62)
Q25	0.25(6.35)
Q20	0.20(5.08)
Q15	0.15(3.81)
Q10	0.10(2.54)

TTL OUTPUT HALF SIZE DIP CRYSTAL CLOCK OSCILLATOR

AHT Series




RoHS
Compliant



13.2 x 13.2 x 5.5mm

OUTLINE DIMENSIONS:

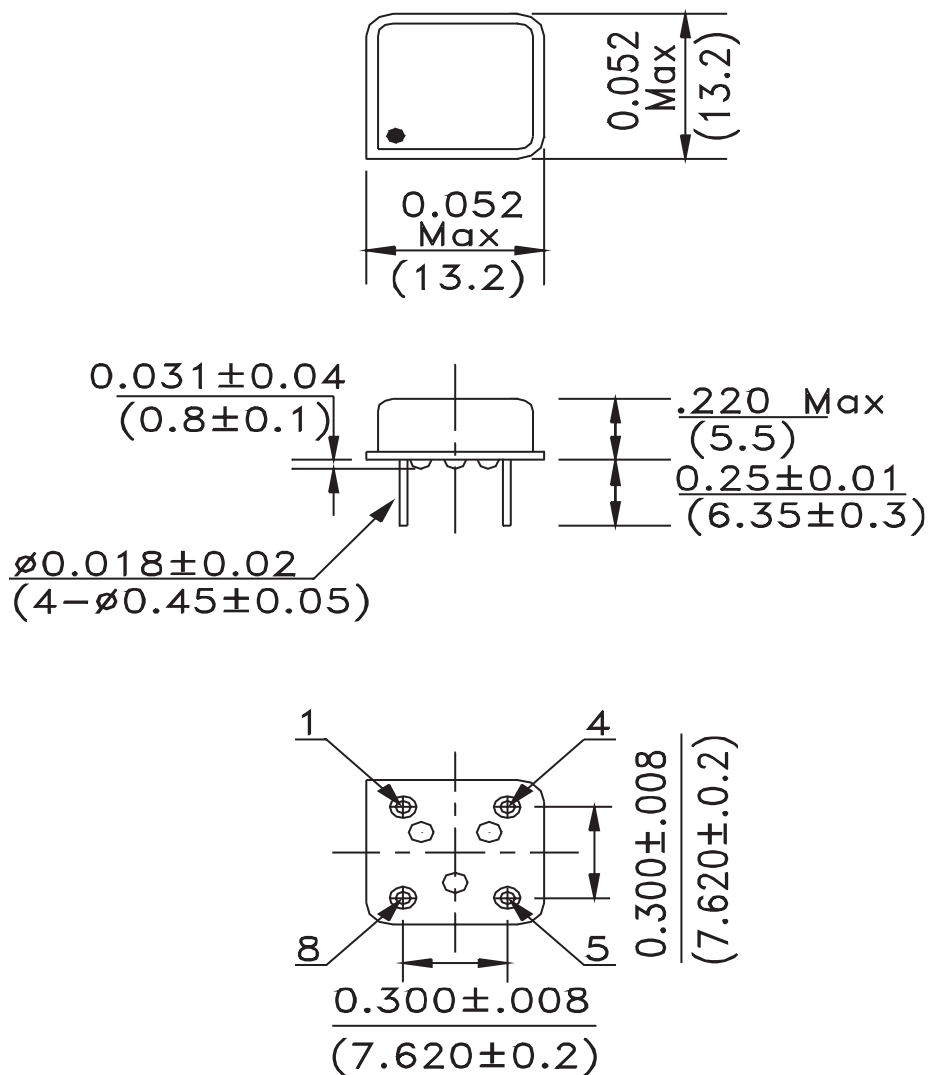

PIN	FUNCTION
1	NC or Tristate Enable/ Disable
4	GND
5	Output
8	VDD

Note: Recommended using an approximately 0.01uF bypass capacitor between PIN 4 and 8.

Dimensions: inches (mm)