



SMD Crystal Unit

FCX-04

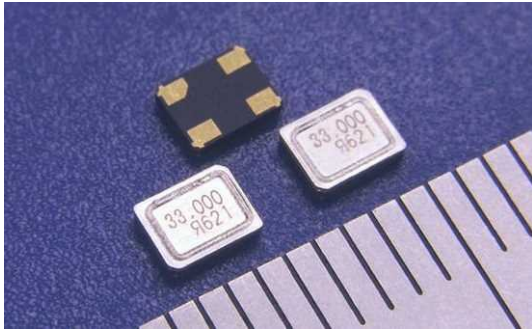

◆ FEATURES

- AT-cut crystal unit / frequency range 13 ~ 60 MHz.
- 3.2 × 2.5 × 0.9 mm Max. / 20 mg.
- Frequency tolerance ±7 ppm available.
- Operating temperature range -40 ~ +105°C available.
- Ceramic with metal lid sealed by patented Electron-Beam-Soldering.
- 18 years of production history.



◆ APPLICATIONS

- Applications that require an accurate clock source.

◆ STANDARD SPECIFICATIONS / ORDERING INFORMATION

Ordering Number (Sample): **C4A** — **16000** — **060** — **C Q3** — **060** — **H X ##**
 (1) (2) (3) (4) (5) (6) (7) (8) (9)

(1) Type
C4A

(2) Nominal Frequency	
13.000 ~ 60.000 MHz	e.g. 16.000 MHz = 16000

(3) Load Capacitance	
5.0, 6.0, 7.0 pF*1	e.g. 6.0 pF = 060

*1 Other capacitances available

(4) Frequency Tolerance @ 25°C	
±7 ppm	A
±10 ppm	B
±15 ppm	C
±20 ppm	D
±30 ppm	E
±50 ppm	F
Other	N

(5) Operating Temperature	Frequency Temperature Characteristics (with reference to 25°C)				
	±10 ppm	±15 ppm	±20 ppm	±30 ppm	±50 ppm
-20 ~ +70°C	P1	P2	P3	P4	P5
-30 ~ +85°C	Q1	Q2	Q3	Q4	Q5
-40 ~ +85°C	-	R2	R3	R4	R5
-40 ~ +105°C	-	-	-	S4	S5
Other	NN				

(6) Equivalent Series Resistance	
13 ~ 15 MHz: 150Ω Max.	150
15 ~ 60 MHz: 60Ω Max.	060
Other	NNN

(7) Storage Temperature*2	
-40 ~ +85°C	G
-40 ~ +105°C	H
-55 ~ +125°C	J
Other	N

*2 Not applicable to packing materials


(8) Tape & Reel (φ180 mm)	
3000 pcs/reel	X
Other	N

(9) RIVER Use Only (As needed)	
--------------------------------	--

Drive Level	
200 μW Max.	

- The codes for the Ordering Number are indicated in blue, and the specifications are described in black.
- Not all combinations of options are available as standard.
- For specifications other than those above, please contact our sales / website and let us know your specific requirements.

◆ OUTLINE DIMENSIONS

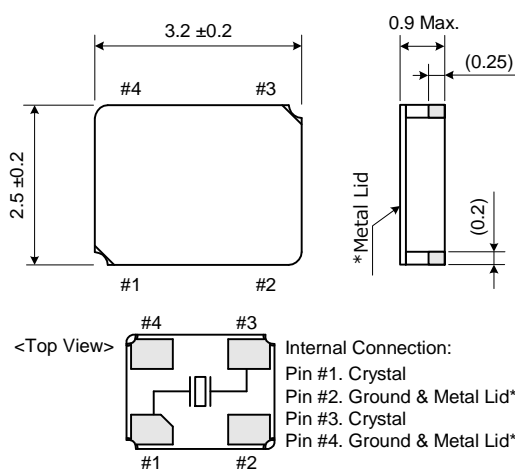

◆ LAND PATTERN

Unit: mm

