


PAD	CONNECTION	PAD	CONNECTION
1	Clock output enable (CLKOE)	6	Ground (VSS)
2	Supply (VDD)	7	Interrupt output (INT)
3	Clock output (CLKOUT)	8	Chip select (CS)
4	Serial clock input (SCL)	9	Backup supply voltage
5	Serial data output (SDO)	10	Serial data input (SDI)

Features

- Temperature compensated accuracy
- AEC-Q200 compliant option
- Compliant with 4-wire SPI-Bus
- Backup battery input (internal switchover)
- Programmable alarm, timer and interrupt

Block Diagram

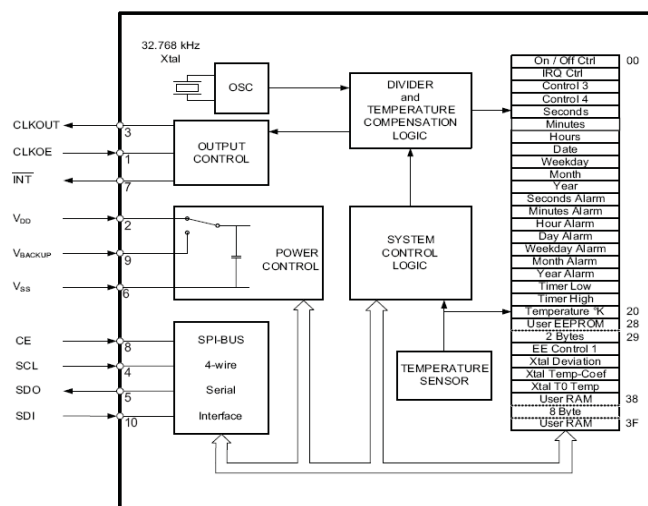

Specifications

Parameters	Product RV3049C3	Option Codes
Frequencies (selectable): 32.768kHz, 1024Hz, 32Hz & 1Hz	■	
Frequency tolerance @ 25°C: ±10ppm typ, ±20ppm max	■	
Time accuracy: ±3ppm max (0.26s/day) @ 25°C ±6ppm max (0.52s/day), -40+85°C ±25ppm max (2.17s/day), -40+85°C ±8ppm max (0.70s/day), -40+125°C ±30ppm max (2.60s/day), -40+125°C	■ □ ■ ■ □	A B D E
Operating temperature range: -40 to +85°C -40 to +125°C	■ □	see above
Storage temperature range: -55 to +125°C	■	
Supply voltage (V_{DD}): SPI bus active 1.8 ~ 5.5V Time-keeping mode 1.3 ~ 5.5V	■ ■	
Supply current (V_{DD}=3.0V): 0.80µA typ, 1.0µA max	■	
Shock and vibration resistance: ±5ppm, 5,000g, 0.3ms, ½ sine ±5ppm, 20g, 10.0 ~ 2,000Hz	■ ■	
Soldering condition: Reflow, 260°C, 20 sec max	■	
Qualification: Commercial AEC-Q200 (Automotive)	■ □	A

■ Standard. □ Optional - Please specify required code(s) when ordering

Ordering Information

Product + option code

eg: **RV3049C3/B** ±25ppm -40+85°C

eg: **RV3049C3/DA** ±8ppm -40+125°C, AEC-Q200

Option code X (eg RV3049C3/X) denotes a custom spec.

- Available on T&R - 1k or 3k pcs per reel. See our website for details
- Evaluation / development board & manual available on request

Description

The RV3049C3 is a Real Time Clock Module with embedded crystal. This RTC has a 4-wire serial interface (SPI-Bus) and offers temperature compensated time. The STC (Smart Temperature Compensation) can be factory calibrated to achieve a very high time accuracy of ±6ppm over -40°C to +85°C (option A) and ±8ppm over -40°C to +125°C (option D).

Beside standard RTC functions, it includes a Backup-Battery Input with internal switchover function, a programmable trickle-charge circuitry, an integrated temperature sensor with digital-output and offers 8 Bytes RAM and 2 Bytes EEPROM for customer application.

The calendar function tracks year and leap-year flags. The clock tracks second, minute and hour in 24-hour format. Programmable alarm setting and universal timer functions increase flexibility.



- Manufactured by Micro Crystal
- Stocked & supplied by Golledge